


## 2 3/8 NHL Regulation Arena Style Hockey Goal Assembly Instructions

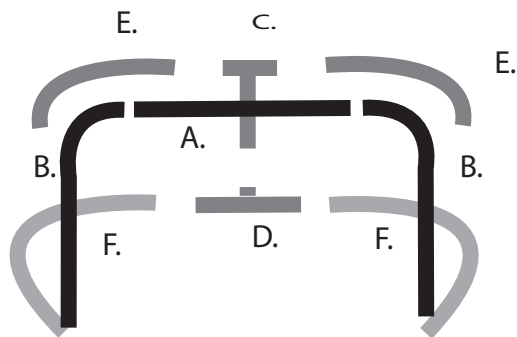


- (1-qty) Red Crossbar (A.)
- (2-qty) Red Posts (B.)
- (1-qty) White Diagonal Support Bar (C.)
- (1-qty) 144" Heavy Duty Skirt (Not Pictured)
- (1-qty) Net Only Arena (Not Pictured)
- (1-qty) White Base Tee (D.)
- (2-qty) White Top Shelf Back Halves (E.)
- (2-qty) White Base Halves (F.)
- (1-qty) Diagonal Support Bar Pad (Not Pictured)
- (1-qty) 124" Base Pad (Not Pictured)
- (1-qty) 100 Feet of White Cord (Not Pictured)

The plastic wrap may be left on until fully assembled


Begin by laying red posts and red crossbar face down on a smooth, flat, non-abrasive surface. Wire loops and bolts will now face up, away from floor. Use care not to scratch face of goal. Insert each end of the crossbar into post elbows. Snug bolts at first, then tighten 1/4 max after verification of parallel posts.

Loosely assemble base tee into each end of the base halves back end (2-qty bolts on back end of base halves). All wires should be facing up. Next, insert diagonal support bar into base tee stem. Snug bolt. Next, line base fronts (1-qty bolt on front end of base halves) to post fittings. Slide together, best done simultaneously. In order to avoid pinching, wriggling may be necessary.




Lastly, slide the two top shelf back halves, long end, into top of diagonal support bar. Swing top shelf Assemble towards crossbar, fitting top shelf front ends into post fittings.

Set goal upright, check for even fit. Base Halves will not necessarily fit completely into post fittings. There may be a small gap of wire loops at base tee as well. Tighten all bolts after alignment is satisfactory.

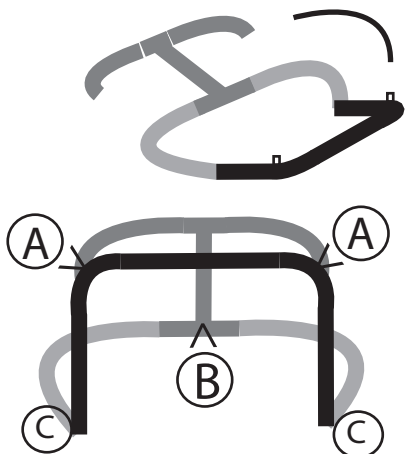

Tie netting top corners (A.) to each top corner (A.) of goal. This is very important. Tie netting corners (C.) to each bottom corner (C.) of goal. Find center of bottom edge of netting (B.) by counting 'selvages' (net loops) from one bottom corner to the other. Tie centered netting to base at tee (B.). Find center of net at top shelf of goal by counting selvages once again. Tie centered netting at middle of crossbar.

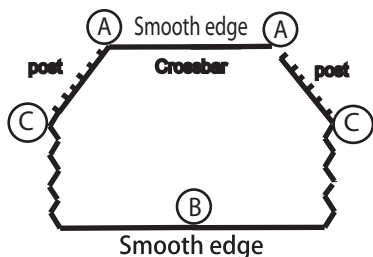

Begin lacing netting onto goal, starting at center of top shelf out to corners (A.) of goal.. Wire loops do not necessarily correspond to selvages, lace evenly. Do one side, then the other. Next, lace base at tee (B.), out to posts (C.). Lace netting evenly towards posts, while considering proper fit. You may run out of smooth base netting and complete base with cut netting. Do one side, then the other. Lastly, lace netting onto goal along posts, corner of goal (A.) to base (C.). Do one side, then the other.

Skirting is tied onto netting, on back of goal, above base. Find center of skirt and attach at base tee (B.). Once knot has been made centering skirt onto netting, remaining skirt is attached by weaving string through netting and hole simultaneously with an in and out motion. Please allow skirt to 'pucker' along top of skirt as it follows the curve. Bottom of skirt is tied onto welded wire loops as well as net. Lace both top and bottom of skirt, completing with knot.

